



OEM Scan Engines and Devices

Deliver industry-leading features, durability and reliability

For full detailed specification, please refer to the Data Sheet on zebra.com/oem

Contents



OEM Scan Engines

Industry-leading barcode scanning at any range



Fixed Mount Scanners

High-volume, hands-free scanning



Decoders

Save space and power while reducing costs with flexible decoder choices for any OEM product



RFID



Contact

Contact our team of specialists

Icon Key

Industry sectors



1D



Mobile



2D



Drone



Indoor



Healthcare



Outdoor



Gaming/Lottery



Fixed



Kiosk/Cabinets/Vending



RFID

Scan Engine Illumination & Aiming icons



1D Linear Device



Red Illumination
Red LED Aimer



White Illumination
No Aimer



Red Illumination
Red Laser Aimer



White Illumination
Red LED Aimer



White Illumination
Red Laser Aimer



White Illumination
Green LED Aimer



Red Illumination
Red Laser Aimer



Red Illumination
No Aimer



White Illumination
Green Laser Aimer

OEM Scan Engines

Industry-leading barcode scanning at any range



OEM Scan Engines



SE950

Miniature scan engine with optimum quality, reliability and durability

- Ideal for enterprise and consumer use
- 1-piece scan engine
- Serial host interface
- Standard range scanning distance

[FIND OUT MORE](#)



SE960-HP/SE965-HP

The largest feature set in one of the smallest engines available

- Ideal for enterprise and consumer use
- Undecoded engine or 1-piece scan engine with on-board decoder
- Serial host interface
- Mid-range scanning distance
- Adaptive scanning
- Programmable scan angle

[FIND OUT MORE](#)



SE655

Brings affordable 1D linear scanning to a wide variety of products

- Ideal for consumer use
- 1-piece scan engine with on-board decoder
- Serial host interface
- Standard range scanning distance
- Low profile ideal for space-constrained products

[FIND OUT MORE](#)

Scanning distances:

Near Range Scanning = up to 12 in./30.5 cm on 100% UPC | Standard Range = up to 24 in./61 cm on 100% UPC | Mid-Range = up to 36 in./91.4 cm on 100% UPC
Advanced Range = up to 50 ft./15.2 m on low density barcodes | Extended Range = over 50 ft./15.2 m on low density barcodes | High Density = close range on high density barcodes

OEM Scan Engines



SE2100

An affordable tiny turnkey combination imager engine and illumination system

- Ideal for consumer use
- Hardware decoder separate from scan engine or scan engine with software decoder running on host device
- MIPI host interface
- OCR and image capture
- Near range scanning distance
- Low profile ideal for space-constrained products
- Resolution: 640x480 sensor

[FIND OUT MORE](#)

SE2707

Decoded scan engine in an easy-to-integrate, cost-effective form factor

- Ideal for enterprise and consumer use
- 1-piece scan engine with on-board decoder
- Serial or USB host interface
- OCR and image capture
- Near range scanning distance
- Resolution: 640x400 sensor

[FIND OUT MORE](#)

SE4100/SE4107

The ultra-miniature and cost-effective 2D imaging engine

- Ideal for enterprise and consumer use
- Decoded/Undecoded:
 - SE4100: Hardware decoder separate from scan engine or scan engine with software decoder running on host device
 - SE4107: 1-piece scan engine with on-board decoder
- Host interface:
 - SE4100: Parallel or MIPI host interface
 - SE4107: Serial or USB host interface
- OCR and image capture
- Standard range scanning distance
- Low profile ideal for space-constrained products
- Resolution: 1280x960 sensor

[FIND OUT MORE](#)

SE4700

Undecoded engine in an easy-to-integrate, cost-effective form factor

- Ideal for enterprise and consumer use
- Scan engine with software decoder running on host device
- Parallel or MIPI host interface
- OCR and image capture
- Near range scanning distance
- Low profile ideal for space-constrained products
- Resolution: 640x400 sensor

[FIND OUT MORE](#)

Scanning distances:

Near Range Scanning = up to 12 in./30.5 cm on 100% UPC | Standard Range = up to 24 in./61 cm on 100% UPC | Mid-Range = up to 36 in./91.4 cm on 100% UPC
 Advanced Range = up to 50 ft./15.2 m on low density barcodes | Extended Range = over 50 ft./15.2 m on low density barcodes | High Density = close range on high density barcodes

OEM Scan Engines



SE3300/SE3307

High-quality performance in an affordable package

- Ideal for enterprise and consumer use
- Decoded/Undecoded:
 - SE3300: Hardware decoder separate from scan engine or scan engine with software decoder running on host device
 - SE3307: 1-piece scan engine with on-board decoder
- Host interface:
 - SE3300: Parallel host interface
 - SE3307: Serial or USB host interface
- OCR, document and image capture
- Standard range and high density scanning distance
- Models: SR, HD, WA
- Resolution: 752x480 sensor

[FIND OUT MORE](#)

SE4710

A miniature high-performance imager for mobile devices

- Ideal for enterprise and consumer use
- Hardware decoder separate from scan engine or scan engine with software decoder running on host device
- Parallel or MIPI host interface
- OCR, document and image capture
- Standard range scanning distance
- Low profile ideal for space-constrained products
- Resolution: 1280x800 sensor

[FIND OUT MORE](#)

SE4760

Ideal for integration into mid-tier mobile devices

- Ideal for enterprise and consumer use
- Scan engine with software decoder running on host device
- MIPI host interface
- OCR, document and image capture
- Standard range scanning distance
- Low profile ideal for space-constrained products
- Resolution: 768x480 sensor

[FIND OUT MORE](#)

SE4720/SE4770

The ultimate in flexibility with a small design that fits anywhere


- Ideal for enterprise use
- Hardware decoder separate from scan engine or scan engine with software decoder running on host device
- Parallel or MIPI host interface
- OCR, document and image capture
- Standard range scanning distance
- Aimer:
 - SE4720: LED aimer
 - SE4770: Laser aimer
- Low profile ideal for space-constrained products
- Resolution: 1280x800

[FIND OUT MORE](#)

Scanning distances:

Near Range Scanning = up to 12 in./30.5 cm on 100% UPC | Standard Range = up to 24 in./61 cm on 100% UPC | Mid-Range = up to 36 in./91.4 cm on 100% UPC
 Advanced Range = up to 50 ft./15.2 m on low density barcodes | Extended Range = over 50 ft./15.2 m on low density barcodes | High Density = close range on high density barcodes

OEM Scan Engines

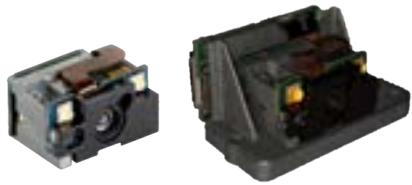

SE4750/SE4757

Resets the bar for imagers, with unparalleled performance on many types of data

- Ideal for enterprise use
- Decoded/Undecoded:
 - SE4750: Hardware decoder separate from scan engine or scan engine with software decoder running on host device
 - SE4757: 1-piece scan engine with on-board decoder
- Host interface:
 - SE4750: Parallel or MIPI host interface
 - SE4757: Serial or USB host interface
- OCR, document and image capture, direct part marking
- Standard range, mid-range and high density scanning distance
- Models:
 - SE4750: SR, MR, DP
 - SR4757: SR
- Resolution: 1280x960

[FIND OUT MORE](#)



SE4850

Extended range imaging engine with brighter laser aimer

- Ideal for enterprise use in specialized applications such as drones and robots
- Hardware decoder separate from scan engine or scan engine with software decoder running on host device
- MIPI host interface
- OCR, document and image capture
- Extended range scanning distance
- IntelliFocus technology
- Dual imaging systems
- Resolution: Dual 1280x800 sensors

[FIND OUT MORE](#)



SE55

Large working range in a small package

- Ideal for enterprise use in specialized applications such as drones and robots
- Hardware decoder separate from scan engine or scan engine with software decoder running on host device
- MIPI host interface
- OCR, document and image capture
- Advanced range scanning distance
- IntelliFocus technology
- Highly visible, green laser aiming pattern that spans multiple feet at distance
- Low profile ideal for space-constrained products
- Resolution: 2688x1520 4MP sensor

[FIND OUT MORE](#)

Scanning distances:

Near Range Scanning = up to 12 in./30.5 cm on 100% UPC | Standard Range = up to 24 in./61 cm on 100% UPC | Mid-Range = up to 36 in./91.4 cm on 100% UPC
Advanced Range = up to 50 ft./15.2 m on low density barcodes | Extended Range = over 50 ft./15.2 m on low density barcodes | High Density = close range on high density barcodes

Scan Modules and Fixed Mount Scanners

High-volume, hands-free scanning



Scan Modules

SM72 Series


The first single-plane scan module specially designed for OEM Integration bringing innovation to self-checkout and self-service kiosks.



SM7201

- Purpose-built for OEM with seamless integration; can be mounted in any orientation
- Intuitive swipe-and-go scanning is ideal for demanding self-service requirements
- Help prevent loss with non-decode event alerts
- USB only
- Models: SR, DL

[FIND OUT MORE](#)



SM7208

- Purpose-built for OEM with seamless integration; can be mounted in any orientation
- Intuitive swipe-and-go scanning is ideal for demanding self-service requirements
- Color camera* to support vision-based applications and loss prevention (optional)
- Reduce shrink with checkpoint and sensormatic to support EAS solutions (optional)
- Help prevent loss with non-decode event alerts
- Add a handheld scanner* via the auxiliary port to let users easily scan large or heavy items in the cart
- Multi-interface: USB, RS232, TGCS (IBM) 46xx over RS485, KBW
- Models: SR, DL

[FIND OUT MORE](#)

* Use of an auxiliary scanner and/or color camera requires more than 500mA which can be achieved via a high-power USB port (i.e. USB BC1.2), 12VDC PowerPlus cable, or external power supply

Fixed Mount Scanners

MS47 Series*

Multiple options. Single integration effort.



MS4717

- Standard or Flush-Mount (contact scanning) options available; designed for easy integration
- Ideal for integrated solutions
- USB interface
- OCR, document and image capture
- Standard range scanning distance, contact scanning (Flush-Mount versions)
- Models: SR, DL
- Ideal for everyday presentation performance
- Red illumination with red LED aimer for essential applications
- IP54 (Standard versions); dust-sealed (Flush-Mount versions)
- Integrated beeper and user feedback LED

[FIND OUT MORE](#)



MS4727

- Standard or Flush-Mount (contact scanning) options available; designed for easy integration
- Ideal for integrated solutions
- USB interface
- OCR, document and image capture
- Standard range scanning distance, contact scanning (Flush-Mount versions)
- Models: SR, DL
- Enhanced presentation performance is best for demanding swipe-and-go applications
- White illumination with green LED aimer for broad user appeal
- IP54 (Standard versions); dust-sealed (Flush-Mount versions) and extended operating temperature range
- Integrated beeper and user feedback LED

[FIND OUT MORE](#)



MS4777

- Standard or Flush-Mount (contact scanning) options available; designed for easy integration
- Ideal for integrated solutions
- USB interface
- OCR, document and image capture
- Standard range scanning distance, contact scanning (Flush-Mount versions)
- Models: SR, DL
- Enhanced presentation performance is best for demanding swipe-and-go applications
- White illumination with red laser aimer for use in outdoor or bright environments
- IP54 (Standard versions); dust-sealed (Flush-Mount versions) and extended operating temperature range
- Integrated beeper and user feedback LED

[FIND OUT MORE](#)

*Zebra Aurora™ Vision Compatible

Scanning distances:

Near to contact scanning 0-10 in. | Standard Range = up to 16 in.–24 in. on 100% UPC | Mid-Range = up to 36 in. on 100% UPC
Extended Range = 25 ft. + on large barcodes | High Density = close range on high density barcodes

Fixed Mount Scanners



MS954

Ideal for designs with space constraints, such as kiosks and clinical diagnostic equipment

- Integrated or standalone solution
- Serial host interface
- Standard range scanning distance

[FIND OUT MORE](#)



DS457

Fast and accurate scanning in a tiny footprint that fits in the most space-constrained areas

- Integrated or standalone solution
- Serial or USB host interface
- OCR, document and image capture, direct part marking
- Standard range and high density scanning distance
- Models: SR, HD, DL, DP
- IP54
- Integrated beeper
- Trigger button

[FIND OUT MORE](#)



Scanning distances:

Near Range Scanning = up to 12 in./30.5 cm on 100% UPC | Standard Range = up to 24 in./61 cm on 100% UPC | Mid-Range = up to 36 in./91.4 cm on 100% UPC
Advanced Range = up to 50 ft./15.2 m on low density barcodes | Extended Range = over 50 ft./15.2 m on low density barcodes | High Density = close range on high density barcodes

Decoders

Save space and power while reducing costs with flexible decoder choices for any OEM product



Decoders



PL5000

A model that will fit in every product design

- Hardware decoder for use with scan engine
- OCR, document and image capture, direct part marking
- Dimensions:
 - PL5000-A: PCB 30x16x8mm
 - PL5000-B: PCB 39x26x6mm
 - PL5000-C: BGA chip 19x12x3mm
- Interface:
 - PL5000-A: MIPI or parallel engine interface; Serial or USB host interface
 - PL5000-B: Parallel engine interface; Serial or USB host interface
 - PL5000-C: MIPI or parallel engine interface; Serial or USB host interface

[FIND OUT MORE](#)



SDL

(Software Decode Library)

Save space and power while reducing costs with software decode

- Software decoder for use with scan engine
- OCR, document and image capture, direct part marking
- Support for Android™ and Linux®

[FIND OUT MORE](#)



SDC

(Software Decode for Cameras)

Empower off-the-shelf cameras with quality 1D and 2D scanning

- Software decoder for use with camera
- Support for Android and Linux
- Cloud-based software licensing

[FIND OUT MORE](#)

RFID



RE40

Zebra's first RFID module designed to be embedded into third-party OEM equipment

- Use in fixed and mobile devices
- For enterprise and consumer use
- EPC global UHF gen 2
- SMT module or PCB mounted carrier board with dual antenna ports
- Worldwide compliance
- Dimensions:
 - SMT module: 27x30x3mm
 - PCB: 69x43x10mm

[FIND OUT MORE](#)





Why Zebra for OEM?

With Zebra's comprehensive and proven OEM portfolio, you can:

- Deliver leading edge technologies that increase customer loyalty
- Speed up your time to market
- Improve your profit margins
- Take time and cost out of your product development cycles
- Build your brand

From component scan engine technology that easily integrates into your design, to private labeled wireless and mobile computing solutions with your specifications and brand logo, our OEM portfolio delivers solutions your customers can count on, while reducing your costs and time-to-market.

Contact

Be powered with Zebra OEM inside.

Visit www.zebra.com/oem

or access our global contact directory at

www.zebra.com/contact

For full detailed specification, please refer to the Data Sheet on zebra.com/oem